

Technical Specifications

Power Supply	24VDC SELV (min. 12VDC max. 30VDC)
Power Consumption	max. 3.2W@64 devices
Ambient Temperature	0°C...55°C / 32°F...131°F
Humidity	max. 75% r.H (non condensing)
Output	switchable DALI power supply
Maximum Wire Length	up to 300m with a cross section of 1.5 mm ²
Maximum Devices	64
Safety Rating	IEC 62386-101:2009
Maintenance & Cleaning	This device is free of maintenance and may only be cleaned with a dry cloth.

LOXONE

No Gimmicks.
Real Smart Homes.

LOXONE

Need Help?

loxone.com/support

Loxone Electronics GmbH
Smart Home 1
4154 Kollerschlag
Austria

loxone.com



DALI Extension

Part No.: 100200




About the product

The Loxone DALI Extension enables interfacing with up to 64 control gear devices. It can be used for a variety of nonsafety critical applications within your smart home.

Installation & electrical connection

The installation of this device has to be carried out by a qualified person. The device has to be fitted in accordance with building regulations for electrical and fire safety. If the device is not installed according to manufacturers guidelines the protection of the device may be affected.

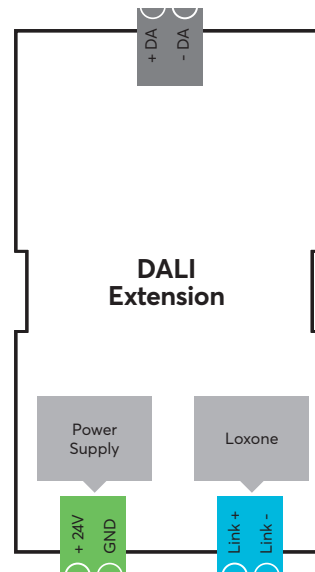

For additional information, declaration of conformity, visit www.loxone.com/help/dali