

Technical Specifications

Interface	Fröling-Software 5.11 or higher is required
Power Supply	24VDC SELV
Power Consumption	max. 30mA
Ambient Temperature	0...50°C / 32...122°F
Storage Temperature	-20...70°C / -4...158°F
Humidity	95% r. H. (non condensing)
Protection	IP20
Maintenance & Cleaning	This device is free of maintenance and may only be cleaned with a dry cloth.

LOXONE

No Gimmicks.
Real Smart Homes.

LOXONE

Need Help?

loxone.com/support

Loxone Electronics GmbH
Smart Home 1
4154 Kollerschlag
Austria

loxone.com



Fröling Extension

Part No.: 100158



About the product

The Fröling Modbus Extension is a device for automatic control and management of home automation and similar non safety critical applications.


Installation & electrical connection

The installation of the devices has to be mounted on a DIN rail in an electrical distribution housing (Standard distribution) and may only be performed by qualified personnel.

Protection against electrical contact and fire protection must be provided in the final installation by the use of a standards compliant/approved housing.

To turn the unit on/off during installation and in case of failure, a separator (disconnecting device) must be present. These must be easily accessible and visible.

If the unit is used in a non conform manner as specified by the manufacturer the product included safeguards will be impaired.

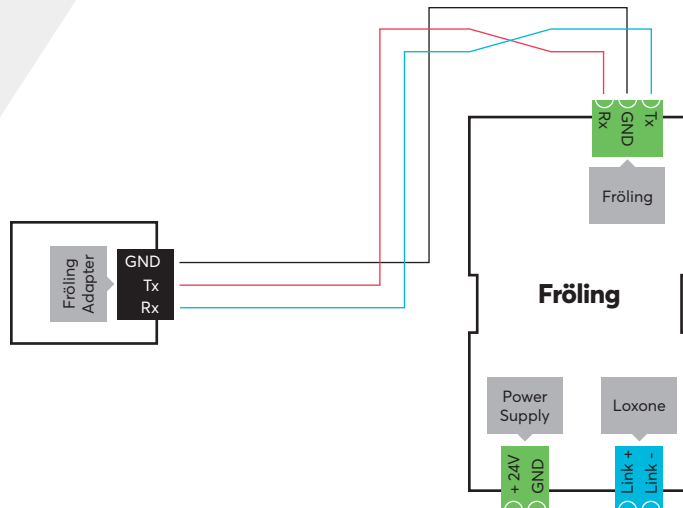

For additional information, declaration of conformity, visit www.loxone.com/help/froeling