

Technical Specifications

Power Supply	CR2032 Lithium Battery
Expected Battery Lifetime	>2 years
Indoor Range	up to 30m
Ambient Temperature	0...55°C / 32...131°F
Safety Rating	IP20
Radio Frequency	868MHz (SRD Band Europe), 915MHz (ISM Band Region 2) max. Power 3.16mW
Maintenance & Cleaning	This device is free of maintenance and may only be cleaned with a dry cloth.

LOXONE

No Gimmicks.
Real Smart Homes.



LOXONE

Need Help?

loxone.com/support

Door & Window Contact Air

Part No.: 100210 (white)

Part No.: 100213 (anthracite)

Loxone Electronics GmbH
Smart Home 1
4154 Kollerschlag
Austria

loxone.com



About the product

The Loxone Window & Door Contact will quickly detect any open windows or doors in your smart home and similar non safety critical applications.

Features

- supports Loxone Air technology.

Installation & electrical connection

If the device is not installed according to manufacturers guidelines the protection of the device may be affected.




Information

Contains FCC ID: COR-ZWIR4512AC1

This device complies with part 15 of the FCC Rules.

Operation is subject to the following two conditions:

1. This device may not cause harmful interference
2. This device must accept any interference received, including interference that may cause undesired operation

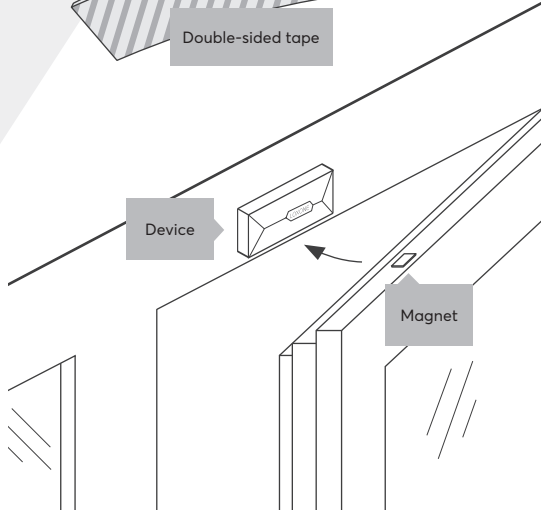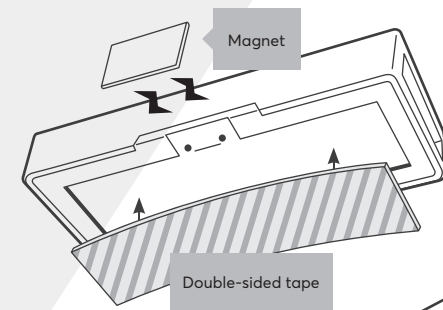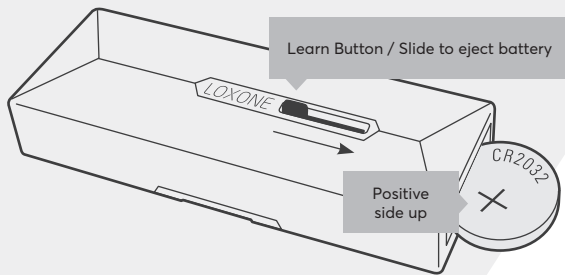

For additional information, declaration of conformity, visit www.loxone.com/help/air